


TECHNICAL SHEET

Ref.0981 OVAL STANDARD LOCK

Simple and versatile steel oval carabiner for basic fall arrest and positioning applications.
Screw gate locking system.

CONSTRUCTION

GENERAL

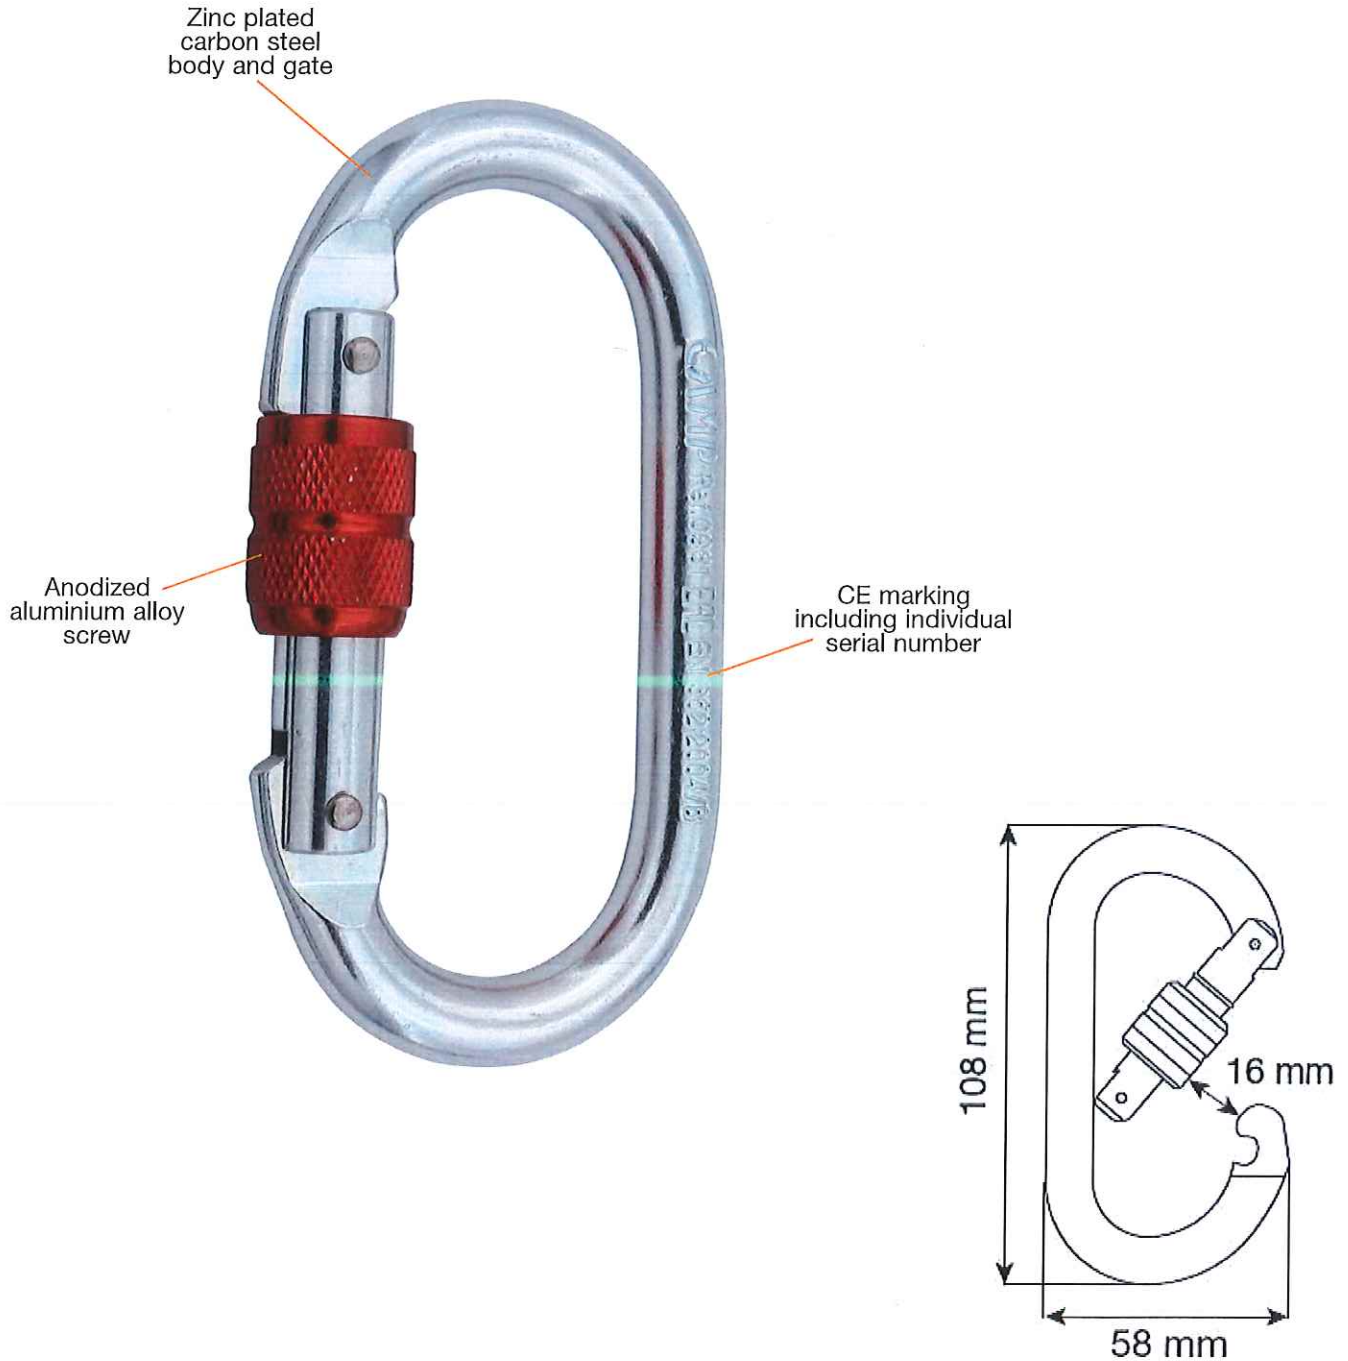

Ref.	Product name Nombre del producto	Weight Peso									CE	EAC	ANSI	SP
		g	oz											
0981	OVAL STANDARD LOCK	165	5.8	28	7	10		16	108	58	B	•		

TECHNICAL SHEET

Ref.2782 CARRY 15

Lightweight 15 liter bag constructed from 600D polyester fabric.
Designed to carry personal fall protection equipment (harness, helmet, lanyard).
Pull cord closure.
Adjustable shoulder strap.

GENERAL CONSTRUCTION PLATFORMS



Ref.	Product name Nombre del producto	Capacity Capacidad	Weight Peso		Dimensions Dimensiones	EAC
			g	oz	cm	
2782	CARRY 15	15 L	150	5.3	ø24x46	•


Ref.1275I **BASIC DUO**

A full body harness with 2 attachment points for fall arrest:
1 sternal double textile loop, 1 dorsal steel ring.
Easy Belt (ref.1268) can be attached for work positioning.
Steel components.
One size fits all.

CONSTRUCTION

CONFINED

PLATFORMS

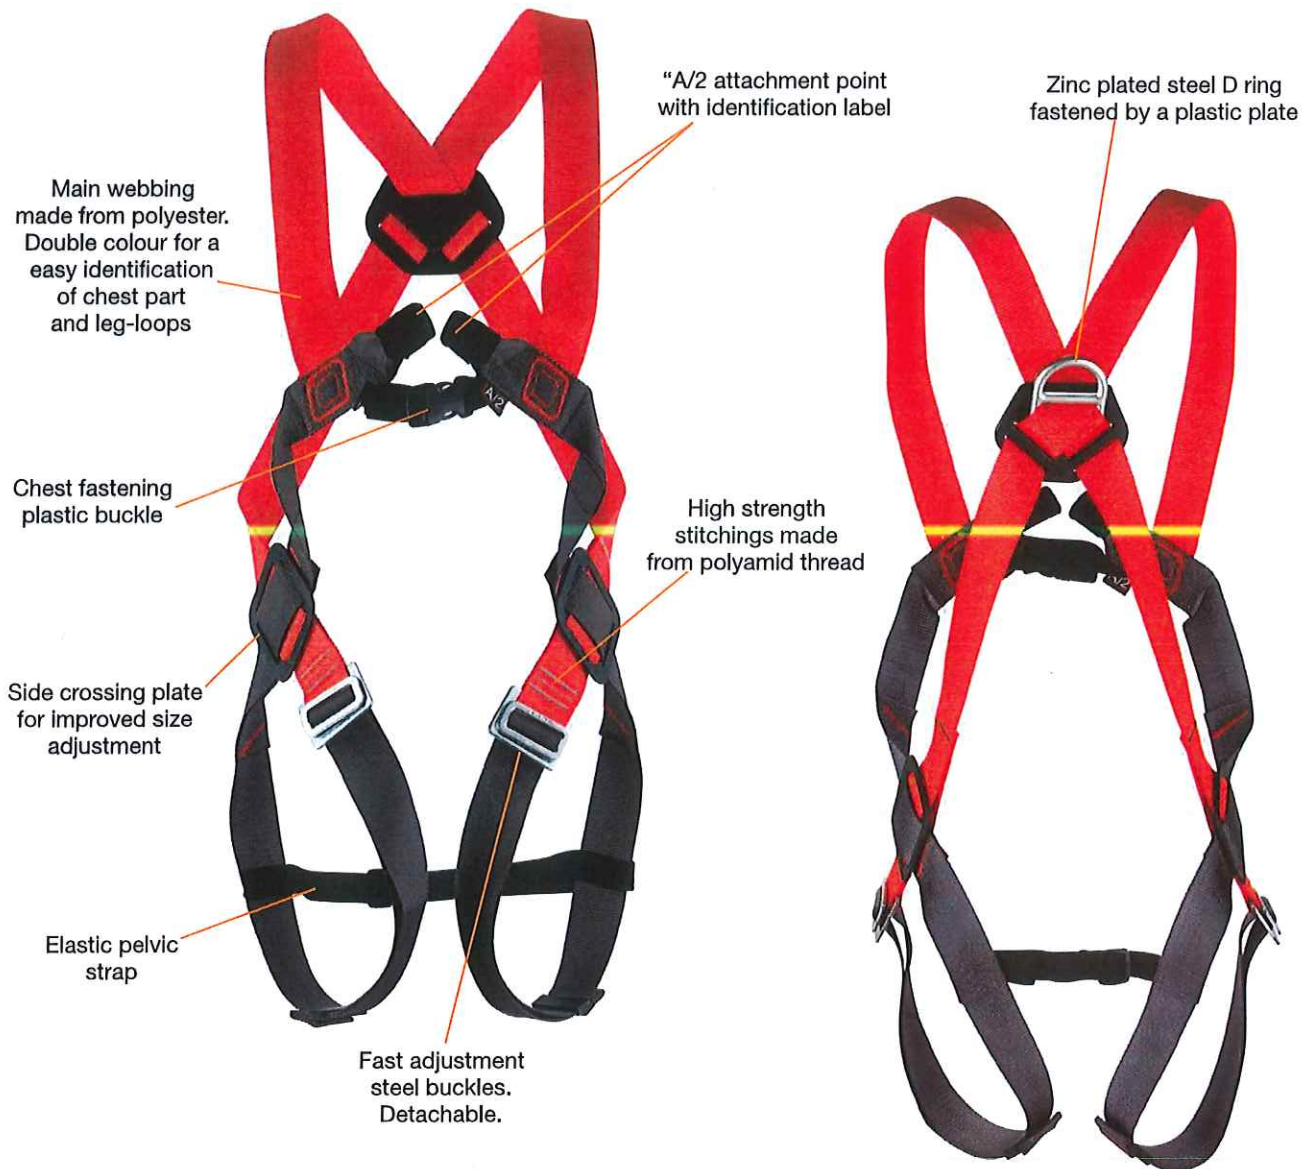

Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Chest Pecho	Legs Perneras	Height Altura	CE	EN 361	EAC	Attachment points Puntos de anclaje
			g	oz	A (cm)	C (cm)	D (cm)				
1275I	BASIC DUO	One size Talla única	790	27.9	80-140	45-75	55-85	•	•	•	

Ref.5050102 - 5050103 RETEXO ROPE

Retexo Rope lanyards combine the strength and durability of rope with the premium performance of the Retexo shock absorber. Prium 10.5 mm semi-static rope lanyards have exceptional abrasion resistance and a high breaking strength. Loops and stitches are covered by a robust and compact protective system that is easy to inspect. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm). The Retexo is a next generation energy absorber designed to be particularly light and compact. Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force. With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg. Ideal in situations with limited clearance (<4 m) when used with lanyards with a total length up to 150 cm. Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.


CONSTRUCTION TOWERS/INDUSTRY ROOFS CONFINED

EDGE TESTED



Certified for horizontal use over an edge

SINGLE + 0981 + 2017 190 cm
SINGLE + 0981 + 2017 150 cm

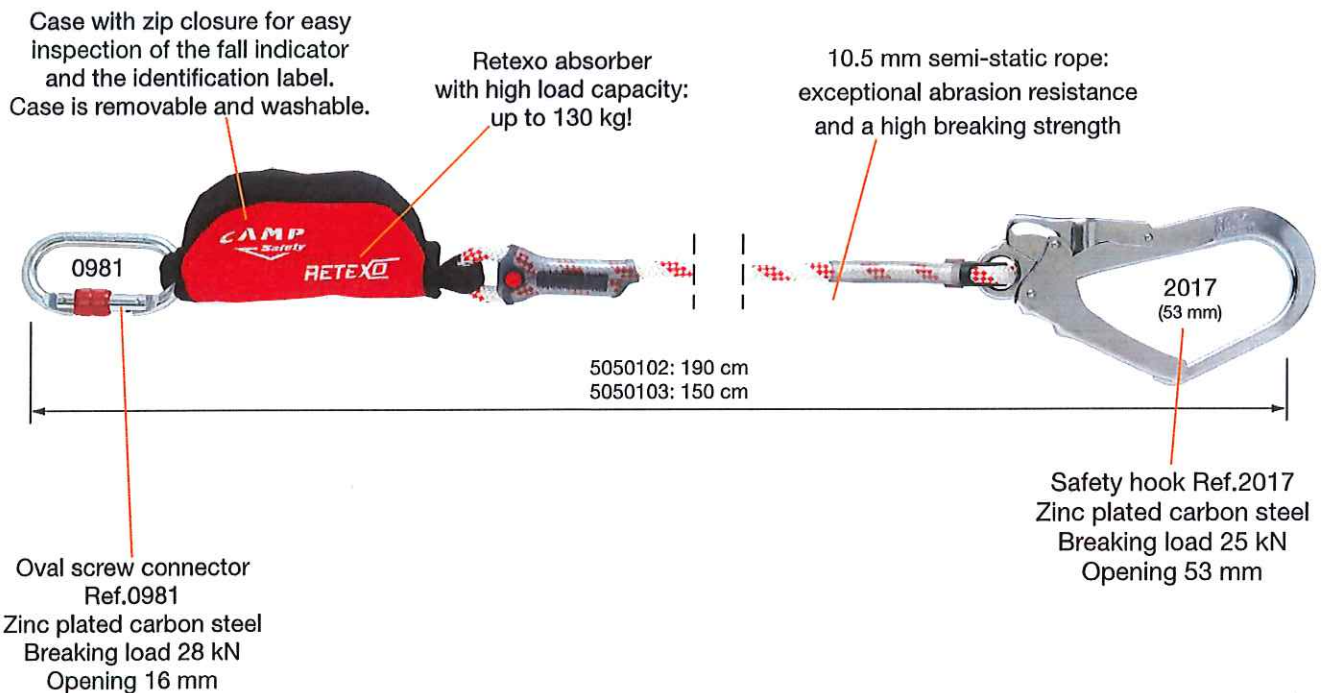

Ref.	Product name Nombre del producto	Weight Peso		Strength Resistencia	Working load Max Carga de trabajo Max	CE	 PPE-R/11.074
		g	oz	kN	kg		
5050102	RETEXO ROPE SINGLE + 0981 + 2017 190 cm	1050	37.1	22	130	•	•
5050103	RETEXO ROPE SINGLE + 0981 + 2017 150 cm	1010	35.7	22	130	•	•

RETEXO ROPE

Loops and stitches are covered by a robust and compact protective system that is easy to inspect




Stitches are covered by a transparent layer for easy inspection.

Loops are protected by a plastic system to avoid the wear and tear on the rope.

Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.




CE Label

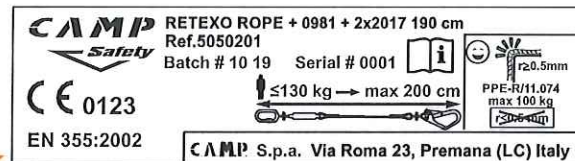

One label with all the information.

Fall Indicator Label

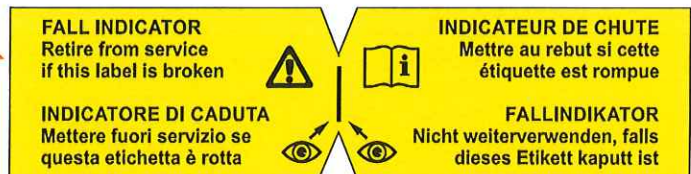

Retire from service if this label is broken

RETEXO ABSORBER - Clearance distance

