

Technical specifications


Alkaline

Pro Power



6LR61

Panasonic Typical Dimensions

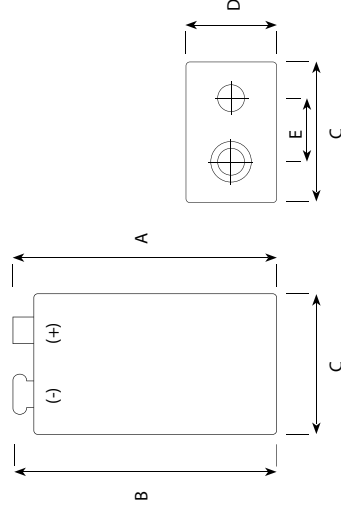

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	48,5	46,5
B	46,4	
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45

Specifications

Name	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	44,3 g
Storage temp. range	+10°C ~ + 25°C
Operating temp. range	-20°C ~ + 45°C
Average Impedance	+/- 2,3 Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EU directive 2006/66/EC
Recommended cut off voltage	4,8V per battery

For more information:


www.panasonic-batteries.com

Panasonic
ideas for life


Typical discharge values

6LR61


Radio: 2h/d 620 ohm end 5,4V

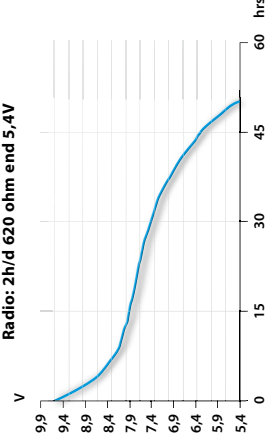

Toy: 1h/d 270 ohm end 5,4V

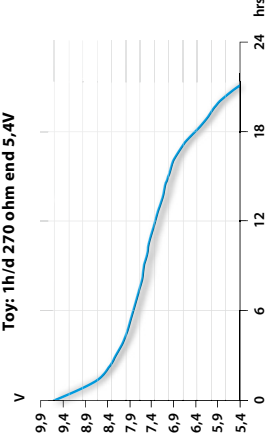

Smoke: 620 ohm + Kohm 1s/h + 24h/d end 7,5V

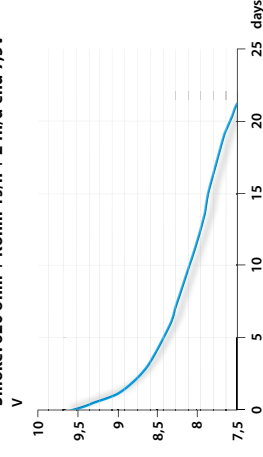

Copyright© Panasonic Energy Europe N.V. ("PECE") 2010 - All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change. 07/2010.

Promoter: Panasonic Energy Europe N.V., P. Cells, Brusselsesteenweg 502, 1731 Zellik, Belgium

For more information: www.panasonic-batteries.com